




FIT-IT-YOURSELF PACKAGE



**SAVE TIME
& MONEY.
BOOST
MACHINE
UPTIME**

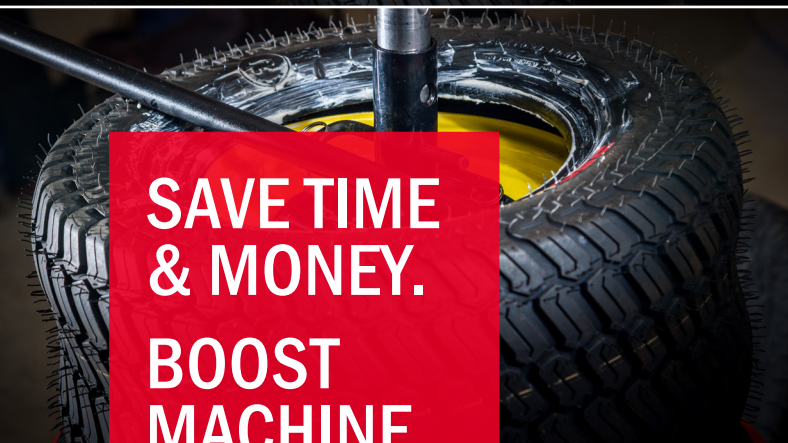

Start saving time and money – place your order today!

**A complete tyre fitting station
delivered for just **£1,675****



www.redstoneuk.com

FIT-IT-YOURSELF PACKAGE

Our **all-in-one package** includes everything you will need to **fit and repair your own tyres**, including comprehensive **on-site training** from one of our expert technicians.

Save time, money & aggravation. Boost machine uptime by turning a corner of your workshop into a tyre fitting station with our FIY Package.



Model TC811BX

One of our experienced tyre technicians will arrive with the equipment and assist you in setting it up*.

He'll conduct on-site training and let you into all of the trade tips and tricks we've picked up over the years. You'll even receive a certificate to confirm your training.

Place your order today:

Call us:
01243 558959

or email:
sales@redstoneuk.com

visit:
www.redstoneuk.com

THE PACKAGE:

1 x Pneumatic Tyre Changer | Model TC811BX

Our British engineered extended tyre changer is easy to operate, compact and robust. With a powerful air-powered bead-breaker and a strong pneumatic wheel clamp, it can handle wheels from 4" to 17.5" in diameter.

1 x Single Barrel Bead Booster

Makes seating even the most difficult tyres easy with a powerful boost of compressed air.

1 x Redwing Tyre Changer Accessory Kit

The tyre changer's companion with all the tools and components for fitting tyres.

1 x Tyre Levers

An additional high quality, forged steel lever to complement the two main tyre changing bars that come as part of the machine.

3kg Xtra-Seal Mounting Compound

Professional grade compound to ease the tyre mounting process.

954ml Xtra-Seal Heavy Duty Bead Sealer

Our heavy duty bead sealer forms an airtight seal and prevents rim leaks.



YOU'LL BE UP & RUNNING IN NO TIME

* Subject to location. Our tyre technician will not fit the tyre changer. Tyre changer comes with all necessary fitments to secure it to the floor and requires an air supply, with air-line connector.